



Cart Mod. PM RS TANDEM

- Structure in cut tube profiles
- Iron deck with treadplate 30 dm
- Rear tipping device to load vehicles, with double-effect cylinder
- Rear foot-board to load vehicles
- Telescopic end-bulkhead
- 4 wheels with Tandem compensating system
- Braking axle

**COSTS OF
BRAKING SYSTEM
TO BE ADDED**





PM.RS EXPORT	SINGLE WHEELS	A	B	F	C	E
		cm.	cm.	cm.	cm.	cm.
PM RS 37x17	20.5/8.00-10	370	170	63	130	160
PM RS 50x17	20.5/8.00-10	500	170	63	130	160
PM RS S 37x17	20.5/8.00-10	370	170	73	130	160
PM RS S 50x17	20.5/8.00-10	500	170	73	130	160

PM.RS.S.	SINGLE WHEELS	A	B	F	C	E
		cm.	cm.	cm.	cm.	cm.
PM RS 41x13 S	200/60-14,5	410	130	74-86	130	140
PM RS 49x13 S	F 74	490	130	74-86	130	140
PM RS 37x17 S	10.075 15.3	370	170	74-86	130	170
PM RS 49x17 S	F 85	490	170	74-86	130	170
PM RS 57x13 S	215/75 17.5	570	130	74-86	130	140
PM RS 61x17 S	F 85	610	170	74-86	130	170
PM RS 65x13 S	F 85	650	130	74-86	130	140

PM.RS.G.	DUAL WHEELS	A	B	F	C	E
		cm.	cm.	cm.	cm.	cm.
PM RS 50x21 G	200/60-14,5	500	210	74	150	190
PM RS 50x23 G	200/60-14,5	500	230	74	150	190
PM RS 61x23 G	200/60-14,5	610	230	74	150	190
PM RS 50x25 G	200/60-14,5	500	250	74	150	240
PM RS 61x25 G	200/60-14,5	610	250	74	150	240
PM RS 65x25 G	200/60-14,5	650	250	74	150	240

PM.RS. HI	DUAL WHEELS	A	B	F	C	E
		cm.	cm.	cm.	cm.	cm.
PM RS 50x21 HI	205/65-17.5	500	210	84	150	190
PM RS 50x23 HI	205/65-17.5	500	230	84	150	190
PM RS 61x23 HI	205/65-17.5	610	230	84	150	190
PM RS 50x25 HI	205/65-17.5	500	250	84	150	240
PM RS 61x25 HI	205/65-17.5	610	250	84	150	240
PM RS 65x25 HI	205/65-17.5	650	250	84	150	240

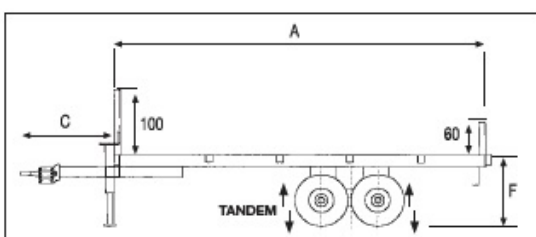

**WE CAN VARY
THE APPROVED
LOAD CAPACITY**

**THESE CARTS CAN BE
BUILT WITH VARIOUS SIZES**

Accessories on request: see page 41