





Manure spreader Mod. A.F.O. tandem



- Rear spreading
- Cut-tube profiles structure with pickled sheet steel
- Deck and sides are made of treated larch planks
- Rigid suspension
- 2 balanced horizontal rollers for rear spreading
- Hydraulic chain feed
- Guides for chain running
- Removable drawbar
- With compensating tandem system
- Axle with mechanical brake
- With road lighting system
- Tractor n° 1 pair of hydraulic jacks for chains operation
- Cardan shaft

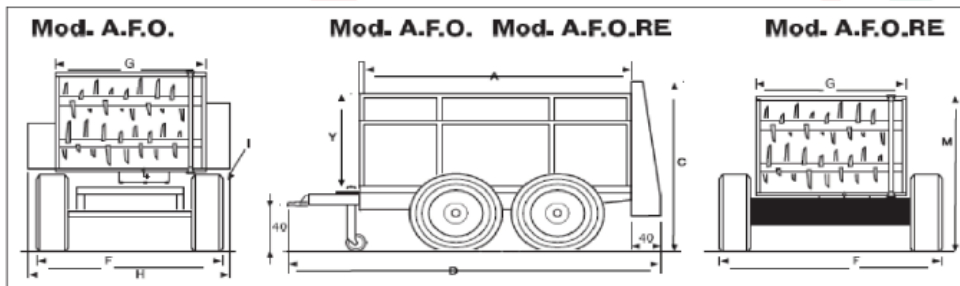

Costs of braking system to add

MOD.	A mm	C mm	D mm	F mm	G mm	H mm	Y mm	TANDEM WHEELS	m ³	TARE Kg		€
A.F.O. 10	3000	2100	4300	1050	850	1050	850	200/6014.5	2.0	1000	1300	
A.F.O. 15	3000	2100	4300	1400	1150	1350	850	200/6014.5	2.8	1160	1700	
A.F.O. 15 S	3500	2100	4800	1400	1150	1350	850	10.07515.3	3.3	1280	1700	
A.F.O. 25	3000	2100	4300	1400	1250	1550	850	200/6014.5	3.0	1250	1900	
A.F.O. 25 S	3500	2100	4800	1550	1250	1550	850	10/75/15 12 PR	3.5	1380	1900	
A.F.O. 35	3500	2100	4800	1600	1500	1800	850	10.07515.3	4.4	1560	2300	

ON DEMAND

COSTS OF BRAKING SYSTEM for 6000 Kg

- **HYDRAULIC WITH PEDAL**



- **PNEUMATIC**

