





Manure spreader Mod. F.V.S. TOP Tandem



- Localized distribution on rows
- Cut-tube profiles structure with pickled sheet steel
- Deck and sides are made of treated larch planks
- 2 adjustable casings for localized distribution on the row
- Guides for chain running
- Extensible drawbar complete
- Wheels with mudguards
- SPECIAL ROTARY "SUPER S" WITH 2 DRIVING DISKS
- EDGE WITH CHAIN FEED
- HYDRAULIC ENGINE FOR CHAINS with a hydraulic control valve for speed regulation and a direction inverter with quick coupling operation of the tractor
- With compensating tandem system
- Axle with mechanical brake
- With road lighting system
- Tractor n° 1 pair of hydraulic jacks for chains operation
- Cardan shaft

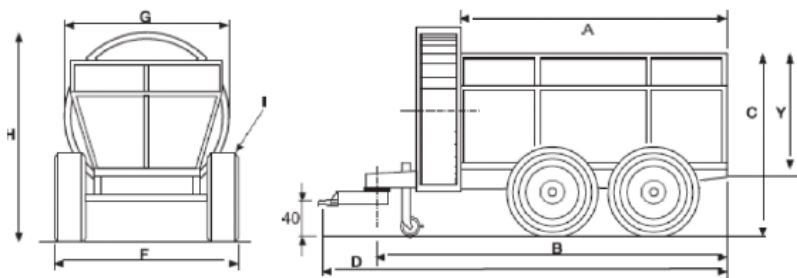

Costs of braking system to add

MOD. 1200	A mm	B mm	C mm	D mm	F mm	G mm	H mm	Y mm	TANDEM WHEELS	m ³	TARE Kg		€
FVS 25 TOP VIGNERON	3000	4050	1400	4600	1650	1200	1550	850	200/60 14.5	2.5	1380	2000	
FVS 35 TOP VIGNERON	3500	4550	1400	5200	1650	1200	1550	850	200/60 14.5	2.9	1500	2000	
FVS 40 TOP VIGNERON	4000	4950	1500	5500	1650	1200	1650	850	200/60 14.5	3.3	1680	3200	
FVS 45 TOP VIGNERON	4500	5650	1500	6000	1650	1200	1650	850	200/60 14.5	3.6	1750	3200	

MOD. 1300	A mm	B mm	C mm	D mm	F mm	G mm	H mm	Y mm	TANDEM WHEELS	m ³	TARE Kg		€
FVS 25 TOP	3200	4150	1400	4700	1850	1300	1650	850	200/60 14.5	3.0	1470	2300	
FVS 35 TOP	3500	4650	1400	5200	1850	1300	1650	850	10.075-15.3	3.3	1550	2300	
FVS 40 TOP	4000	4950	1500	5500	1850	1300	1850	850	10.075-15.3	3.5	1680	3200	
FVS 45 TOP	4500	5650	1500	6000	1850	1300	1850	850	10.075-15.3	4.0	1950	3200	

MOD. 1500	A mm	B mm	C mm	D mm	F mm	G mm	H mm	Y mm	TANDEM WHEELS	m ³	TARE Kg		€
FVS 50 TO	4500	5650	1500	6000	2150	1500	1950	850	10.07515.3	5.0	1950	3000	

STANDARD



Spreader with SUPER "S" special rotator



Engine for hydraulic chain



Edge with chain feed

ON DEMAND

COSTS OF BRAKING SYSTEM for 6000 Kg.

- HYDRAULIC WITH PEDAL



- PNEUMATIC

