


CART TELESCOPIC

- AUTOMATIC BINS LOADING UNLOADING
- 50 tenths pressed sheet metal frame
- Load-bearing chassis in squared tube
- Widening chassis for bin loading
- N° 2 tyres 31x15.50 – 15.76x43 or 10.075 15.3
- Hydraulic control on the tractor for adjustments during the loading operations




SPECIFICS:

- Tractor oil power with 2 double-effect jacks ; 30 Lt. tractor
- 1 lever drives the hydraulic catenary to load and unload the bins
- 1 lever drives the wheels (lift-lower) to tilt the chassis during loading and unloading operations
- 1 lever drives the hydraulic drawbar up/down for adjustment to every terrain during loading and unloading operation
- 1 lever drives the shift DX-SX of the drawbar to simplify the bin input

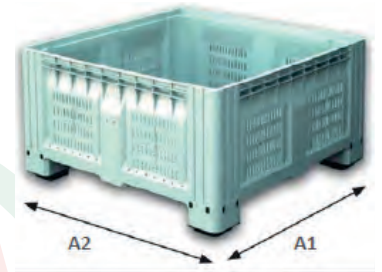

BINS SIZES

A1	A2
113	113
120	110
120	100
120	120
120	80 ON DEMAND

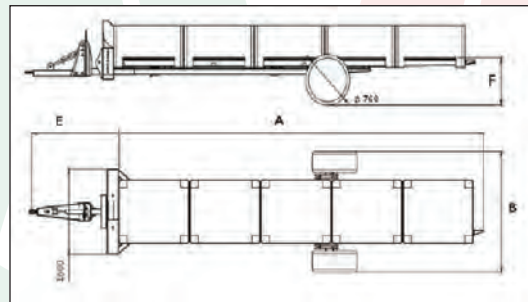

Mod. Telescopico SUPER n° 4 MANUAL LEVERS



MOD.	N. Bins	A mm	F mm min-max	E mm	Capacity Kg	Tare Kg	Load Capacity Kg	B Tyres	€
Telescopico /4	4	5000	100-600	1280	1950	1050	3000	10/075 15.3 – B=2050 or 31x15.50-15 – B=2250	
Telescopico /5	5	6000	100-600	1280	1850	1150	3000		

Mod. Telescopico TOP Electronic with ELECTRIC CONTROL PAD



MOD.	N. Bins	A mm	F mm min-max	E mm	Capacity Kg	Tare Kg	Carload Kg	B Tyres	€
Telescopico EL/4	4	5000	100-600	1280	1950	1050	3000	10/075 15.3 – B=2050 or 31x15.50-15 – B=2250	
Telescopico EL/5	5	6000	100-600	1280	1850	1150	3000		