
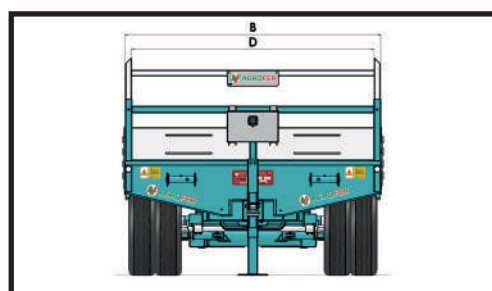



TRAILER P.M.G.

- Robust frame for heavy loads
- HYDRAULIC TIPPING WITH 2 DOUBLE ACTING CYLINDERS
- 500 mm rear platform for machine loading, whole but divided
- Iron platform 30 dm embossed sheet
- Road light system
- Hydraulic parking foot
- Suspensions with cantilever tandem system with leaf spring
- Pneumatic braking on 4 wheels 300x90
- Eyelet F2
- Telescopic front bulkhead
- N ° 2 front rope tensioning winches
- Side hooks for ropes
- Tractor n ° 1 pair of double-acting hydraulic couplings
- Second hand recycled wheels

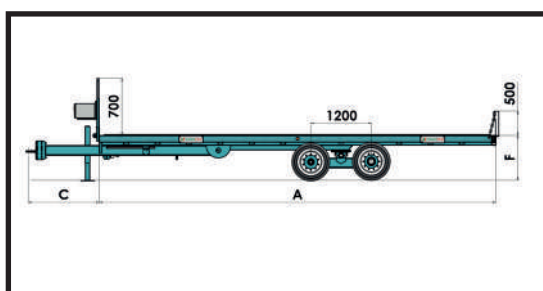

MOD.	A mm	B mm	C mm	D mm	F mm		 Kg	
P.M.G. 57X22	5700	2250	1500	2190	930	215/75 R17.5	3050	
P.M.G. 61x25	6100	2500	1500	2440	930	215/75 R17.5	3200	
P.M.G. 66x25	6600	2500	1500	2440	930	215/75 R17.5	3300	
P.M.G. 76x25	7600	2500	1500	2440	930	215/75 R17.5	3950	

BRAKING SYSTEM 12000-14000-18000 kg



HYDRAULIC PEDAL

TRAILER P.M.G. AS

WITH STEERING REAR AXLE

WITH HYDRAULIC BLOCK



MOD.	A mm	B mm	C mm	D mm	F mm		 Kg	
P.M.G. AS 57X22	5700	2250	1500	2190	930	215/75 R17.5	3050	
P.M.G. AS 61x25	6100	2500	1500	2440	930	215/75 R17.5	3200	
P.M.G. AS 66x25	6600	2500	1500	2440	930	215/75 R17.5	3300	
P.M.G. AS 76x25	7600	2500	1500	2440	930	215/75 R17.5	3950	

BRAKING COST FOR 12000-14000 - 18000 Kg

