
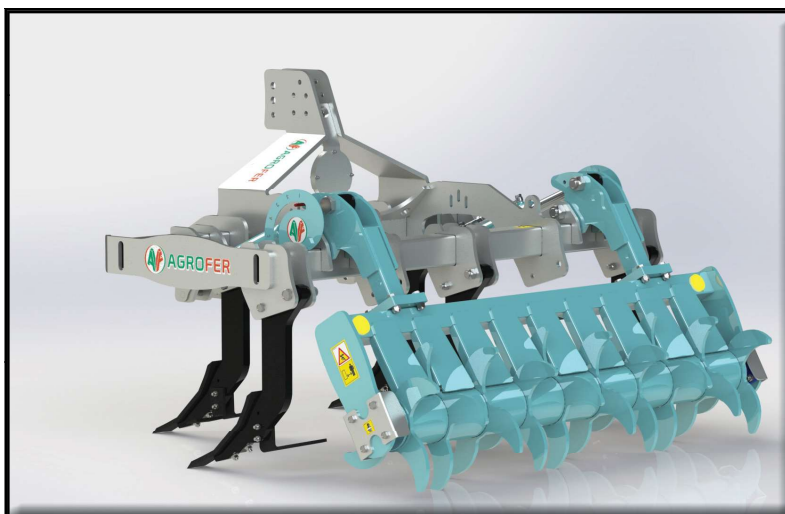
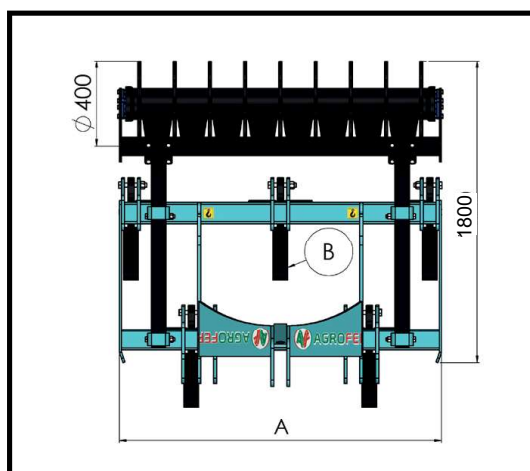





RIPUNTATORE DIS R.I.

- TELAIO IN TUBOLARE SEZIONATO 100x100x8
- Attacco ai tre punti del sollevatore
- Ancore fisse con bullone di sicurezza
- Rullo di profondità con regolazione idraulica olio trattore







MOD.	A mm	B N°	 Altezza Ancore mm		 mm	Kg	 HP	€
DIS.RI 11	1100	3	550	500	1400	550	70	
DIS.RI 15	1500	5	550	500	1800	635	70	
DIS.RI 18	1800	5	550	500	2000	685	70	
DIS.RI 22	2200	7	550	500	2500	760	100	



MOD.	A mm	B N°	 Altezza Ancore mm		 mm	Kg	 HP	€
DIS.RI 11 S	1100	3	700	650	1400	570	70	
DIS.RI 15 S	1500	5	700	650	1800	670	70	
DIS.RI 18 S	1800	5	700	650	2000	720	70	
DIS.RI 22 S	2200	7	700	650	2500	870	100	

RIPPER DIS R.I.

- Cut-tube profile frame 100X100X8
- 3-point hitch on lift
- Fixed anchors with safety bolt
- Depth roller with hydraulic adjustment - tractor oil

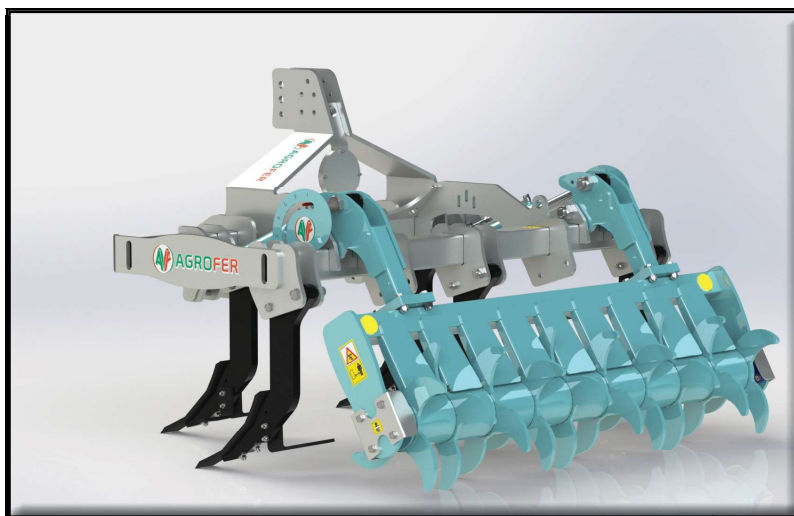
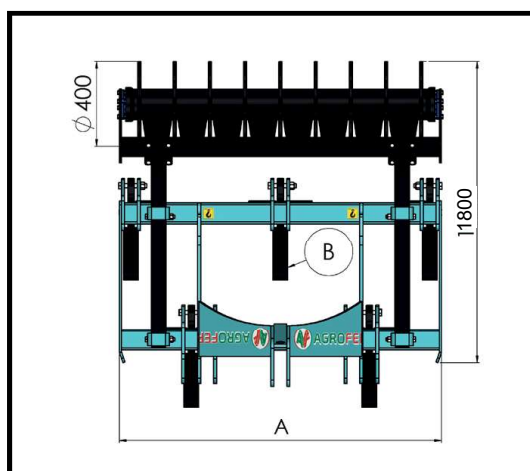




MOD.	A mm	B N°	 Anchors height mm		 700 mm	Kg	 HP	€
DIS.RI 11	1100	3	550	500	1400	550	70	
DIS.RI 15	1500	5	550	500	1800	635	70	
DIS.RI 18	1800	5	550	500	2000	685	70	
DIS.RI 22	2200	7	550	500	2500	760	100	



MOD.	A mm	B N°	 Anchors height mm		 700 mm	Kg	 HP	€
DIS.RI 11 S	1100	3	700	650	1400	570	70	
DIS.RI 15 S	1500	5	700	650	1800	670	70	
DIS.RI 18 S	1800	5	700	650	2000	720	70	
DIS.RI 22 S	2200	7	700	650	2500	870	100	

SOUES-SOLEUSE DIS R.I.

- Châssis en tubulaire sectionné 100X100X8
- Fixation aux trois points de Elévateur
- Ancres à réglage manuel
- Rouleau de profondeur à réglage hydraulique

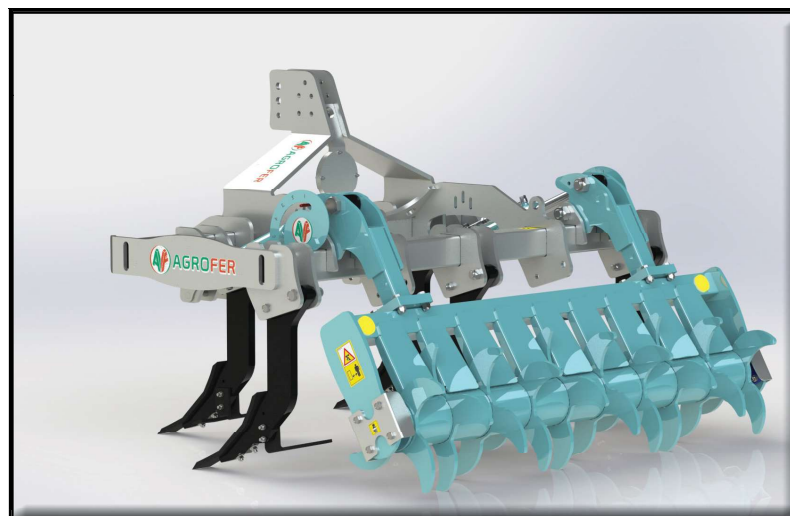
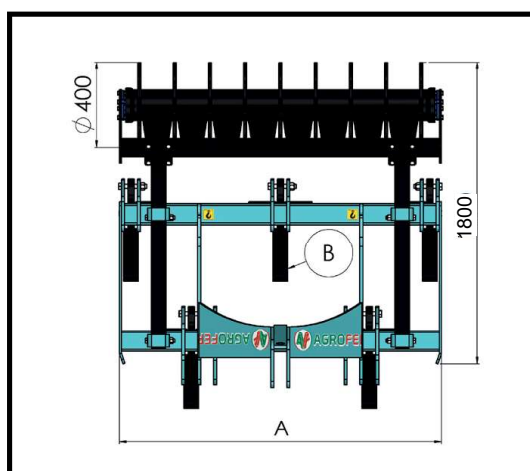




MOD.	A mm	B N°	 Anchors height mm			Kg	 HP	€
DIS.RI 11	1100	3	550	500	1400	550	70	
DIS.RI 15	1500	5	550	500	1800	635	70	
DIS.RI 18	1800	5	550	500	2000	685	70	
DIS.RI 22	2200	7	550	500	2500	760	100	



MOD.	A mm	B N°	 Anchors height mm			Kg	 HP	€
DIS.RI 11 S	1100	3	700	650	1400	570	70	
DIS.RI 15 S	1500	5	700	650	1800	670	70	
DIS.RI 18 S	1800	5	700	650	2000	720	70	
DIS.RI 22 S	2200	7	700	650	2500	870	100	

UNTERGRUNDLOCKERER DIS R.I.

- Formrohrchassis 100X100X8
- Befestigung an den drei Punkten des Hebers
- Manuell verstellbare Scharen
- Tiefenwalze mit hydraulischer Verstellung

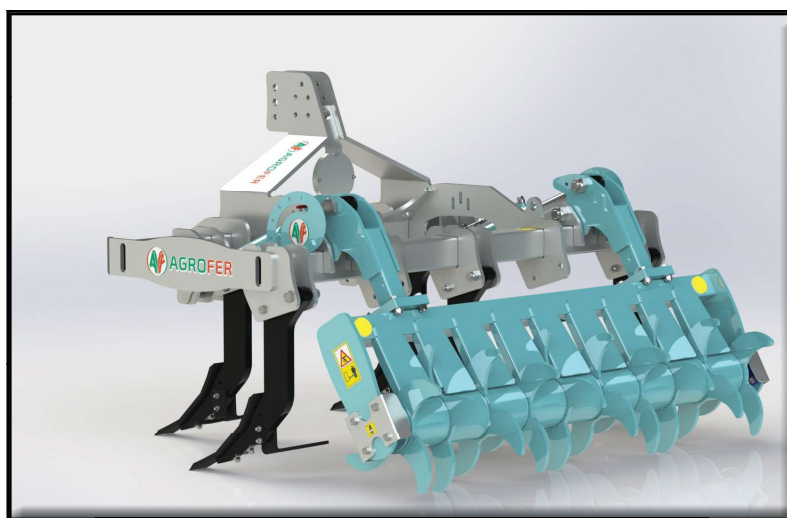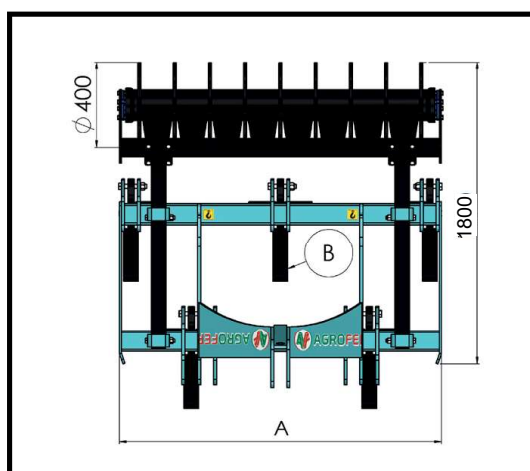

MOD.	A mm	B N°	 Ankerhöhe mm			Kg	 HP	€
DIS.RI 11	1100	3	550	500	1400	550	70	
DIS.RI 15	1500	5	550	500	1800	635	70	
DIS.RI 18	1800	5	550	500	2000	685	70	
DIS.RI 22	2200	7	550	500	2500	760	100	

MOD.	A mm	B N°	 Ankerhöhe mm			Kg	 HP	€
DIS.RI 11 S	1100	3	700	650	1400	570	70	
DIS.RI 15 S	1500	5	700	650	1800	670	70	
DIS.RI 18 S	1800	5	700	650	2000	720	70	
DIS.RI 22 S	2200	7	700	650	2500	870	100	